




xeal

Product Book



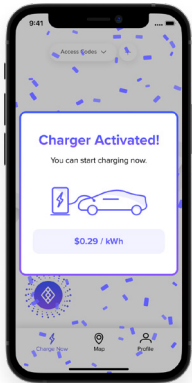

DRIVER APP



BUILDING OWNER PORTAL



WALL MOUNT



PEDESTAL

Key Features

Design	Sleek design and configurable for indoor and outdoor use
Charging Speed	Universal level 2 charger is compatible with all electric vehicles and charges up to 3X faster
Dashboard	Accurate energy metering, dynamic access control, over-the-air updates, and automated revenue share model
Dynamic Power Optimization	Optimizes the power delivered to chargers, even if the panels or breakers are oversubscribed, without relying on a cloud-based management system.
Future-Proof Connectivity	Apollo Protocol allows remote control with no IT capex and no internet dependence to a central server needed to operate
Easy Install	Building-integrated power management with no electrical upgrades
Driver Mobile App	Seamless 'Tap-to-Charge' experience with 50X faster connection and 100% uptime
Reporting	Data reporting, monitoring, customized control, and user management via building portal

Technical Specifications

Charging Power	32 Amp (7.7 kW max)	Installation	Hardwired (3 foot service whip protected)
Product Dimensions	19.7"L x 8.9"W x 5.3"D	Vehicle Connector Type	Over-molded SAE J1772 Connector
Product Weight	13.5 lbs	Accessories Included	SAE J1772 Connector Holster (wall mount)
Supply Circuit	208/240V, 40A	Environment Rating	Indoor/Outdoor rated
Warranty	5 years	Operating Temperature	-22°F to 122°F (-30°C to +50°C)
Charge Cable Length	25 feet	Certifications	UL, ETL, cETL, ENERGY STAR®, OpenADR, LEED
Enclosure	Fully Sealed NEMA 4	Country of Origin	United States of America
Connectivity	Apollo Protocol		

Xeal 32A Level 2 EV Charger

Product Code: A10L25J1-3-X

HIGHLIGHTS

Universal level 2 charger compatible with all EVs. Sleek design and configurable for indoor and outdoor use

Automate revenue share model, accurate energy metering, dynamic access control, and over-the-air updates

Apollo Connectivity: remotely control station with no cellular/WiFi dependence and \$0 recurring network fees

Simple 'Tap-to-Charge' for drivers with 100% reliability and seamless charging experience

Data reporting, monitoring, customized control, and user management via building portal

FEATURES

Power: 32A Continuous Rated
(7.7 kW Max, Optional 24A/16A/8A)

208/240 VAC input

Dimensions: 19.7"L x 8.9"W x 5.3"D
(500 x 226 x 135 mm)

Cable: 25 ft. (7.6m)

Mounting Type:

- Wall Mount
- Pedestal, Single Mount
- Pedestal, Dual Mount



Xeal 80A Level 2 EV Charger

Product Code: B10L25J1-8

HIGHLIGHTS

Universal level 2 charger compatible with all EVs. Sleek design and configurable for indoor and outdoor use

Automate revenue share model, accurate energy metering, dynamic access control, and over-the-air updates

Apollo Connectivity: remotely control station with no cellular/WiFi dependence and \$0 recurring network fees

Simple 'Tap-to-Charge' for drivers with 100% reliability and seamless charging experience

Data reporting, monitoring, customized control, and user management via building portal

FEATURES

Power: 80A Continuous Rated
(19.2 kW Max, Optional 64A/48A/32A/24A)

208/240 VAC input

Dimensions: 14.2"L x 9.8"W x 3.9"D
(361 x 249 x 99 mm)

Cable: 25 ft. (7.6m)

Mounting Type:

- Wall Mount
- Pedestal, Single Mount
- Pedestal, Dual Mount



Product Accessories

Xeal 32A EV Charger Mounting Options

Ground Pedestal: Dual-Mount

Product Code: A10PCR

Ground-mounted pedestal, operates as a single or dual-mount pedestal

Slim, modern profile enhances property aesthetics and enables easy identification of EV Chargers

Compliant with ADA height & reach standards. Compatible with the Xeal 32A Single Port Charger

Dimensions: 44.0”L x 10.2”W x 7.5”D
(111.8 x 25.9 x 19.1 cm)

Weight: 33 lbs



Wall Mount Cable Management Retractor

Product Code: A15ACM

Wall mount retractor that keeps cables off the ground and vehicle connectors protected

Available in single charger configuration and standalone without needing a Ground Pedestal

Dimensions: 6.3”L x 4.5”W x 5.9”D
(16.0 x 11.4 x 15.0 cm)

Weight: 9 lbs



Dual Mount Pedestal with Cable Management (32A & 80A Compatible)

Product Code: B10PDCMH

HIGHLIGHTS

Ground-mounted pedestal, operates as a single or dual-mount pedestal

Durable, Attractive, modern profile enhances property aesthetics and enables easy identification of EV Chargers

Compliant with ADA height & reach standards. Compatible with the Xeal 32A Single Port Charger

Cable Management solution to avoid cable floor drag

FEATURES

Design: Sleek design and configurable for indoor or outdoor use

Product Weight: 69.1kg (152.3 lbs)

Dimensions: 710mm W x 165mm D x 2163 H (28" W x 6.5" D x 85" H)


Cable System: Adjustable tension for precision retracting experience

Warranty: One Year





DeNeal Industrial Sales & Services, LLC
 Authorized Partner
 Tyrone.DeNeal@denisllc.com
 678-575-5866

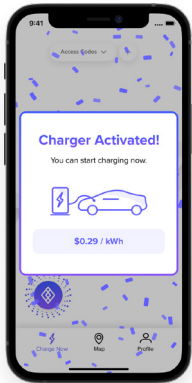

DRIVER APP



BUILDING OWNER PORTAL



WALL MOUNT



PEDESTAL

Key Features

Design	Sleek design and configurable for indoor and outdoor use
Charging Speed	Universal level 2 charger is compatible with all electric vehicles and charges up to 3X faster
Dashboard	Accurate energy metering, dynamic access control, over-the-air updates, and automated revenue share model
Dynamic Power Optimization	Optimizes the power delivered to chargers, even if the panels or breakers are oversubscribed, without relying on a cloud-based management system.
Future-Proof Connectivity	Apollo Protocol allows remote control with no IT capex and no internet dependence to a central server needed to operate
Easy Install	Building-integrated power management with no electrical upgrades
Driver Mobile App	Seamless 'Tap-to-Charge' experience with 50X faster connection and 100% uptime
Reporting	Data reporting, monitoring, customized control, and user management via building portal

Technical Specifications

Charging Power	32 Amp (7.7 kW max)	Installation	Hardwired (3 foot service whip protected)
Product Dimensions	19.7"L x 8.9"W x 5.3"D	Vehicle Connector Type	Over-molded SAE J1772 Connector
Product Weight	13.5 lbs	Accessories Included	SAE J1772 Connector Holster (wall mount)
Supply Circuit	208/240V, 40A	Environment Rating	Indoor/Outdoor rated
Warranty	5 years	Operating Temperature	-22°F to 122°F (-30°C to +50°C)
Charge Cable Length	25 feet	Certifications	UL, ETL, cETL, ENERGY STAR®, OpenADR, LEED
Enclosure	Fully Sealed NEMA 4	Country of Origin	United States of America
Connectivity	Apollo Protocol		




DeNeal Industrial Sales & Services, LLC
Authorized Partner
Tyrone.DeNeal@denisllc.com
678-575-5866

Your answer to an inevitable Electric Future

The smart EV charger with
industry leading uptime
and zero IT dependency.

- Full smart functionality from payments to OTA updates
- Zero IT cost and no IT upgrades guaranteed
- Building manager dashboard
- Dynamic power optimization to minimize your capex

Powered by our patented
self-reliant computing
protocol.

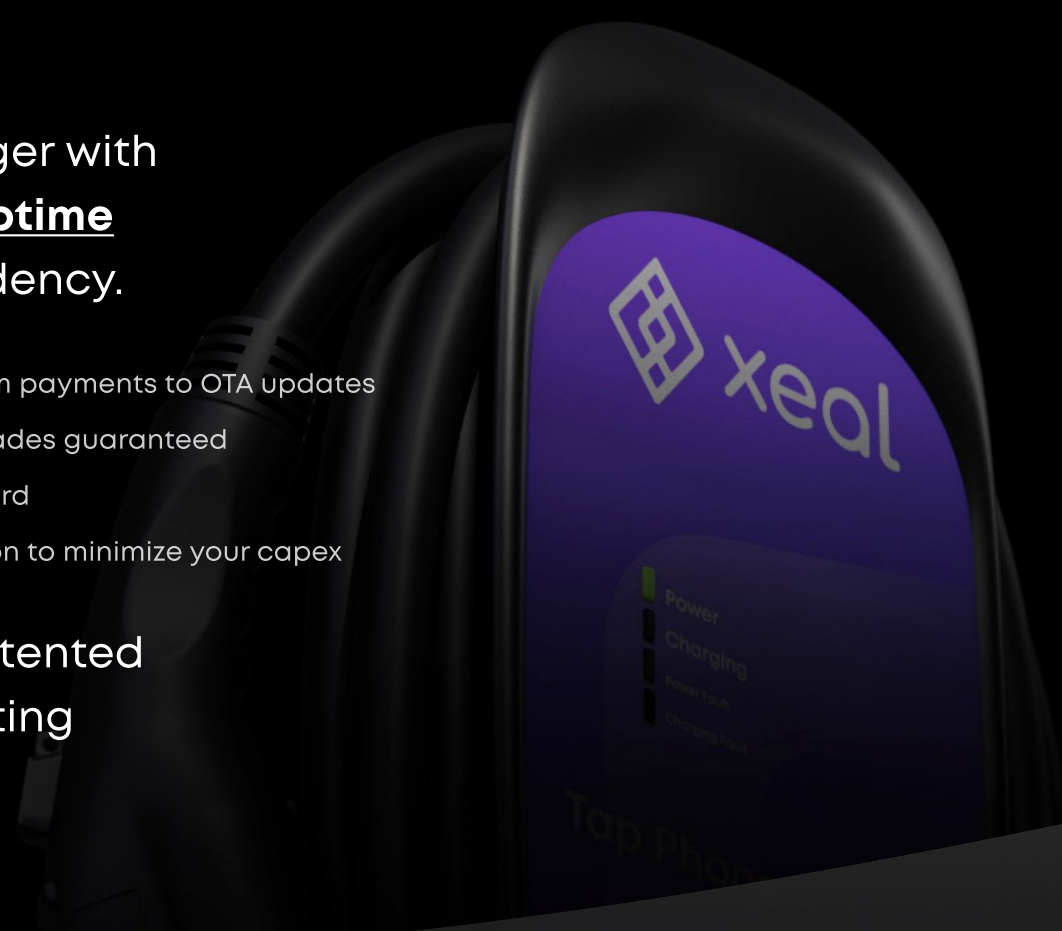


Single tap to start

Access in milliseconds

Instant payments

Unplug to end

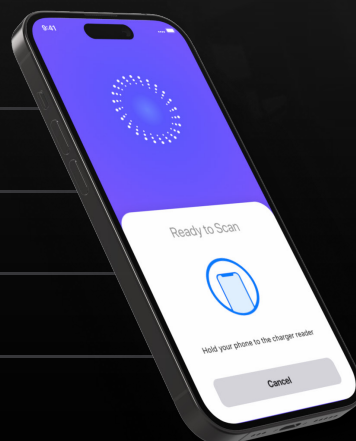

"An advantage of using Xeal was the cost savings by not having to provide network infrastructure out to the charging units. Xeal was the right choice for ease of installation, flexibility in location and zero network infrastructure!"

Joe S, Asset Manager
Commercial Surface Lot
Princeton, NJ